



电梯物联网传媒方案产品简介

汇川工业互联网


产品功能与应用

- 运行数据采集
- 远程视频监控
- 应急救援
- 广告投放
- 楼层显示




安装方法之3G无线中继

1、将安装支架固定在机箱上；

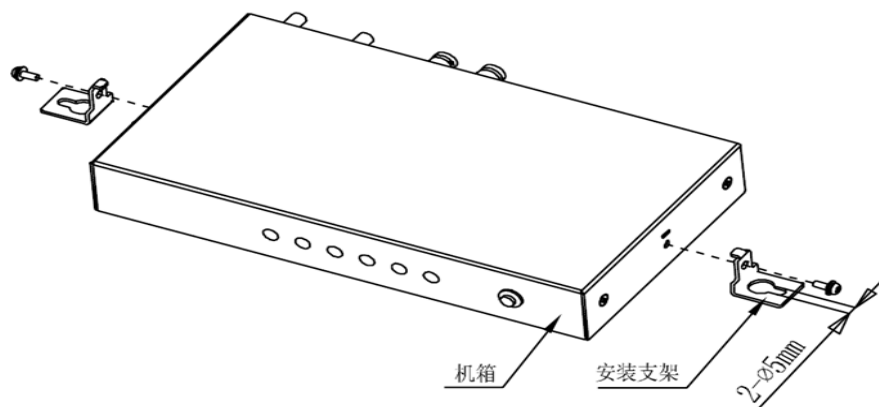

2、将机箱上水平放置安装在设备上，若设备为金属面板，建议开直径为3.2mm的安装底孔，固定自攻螺丝规格为M4x10mm；

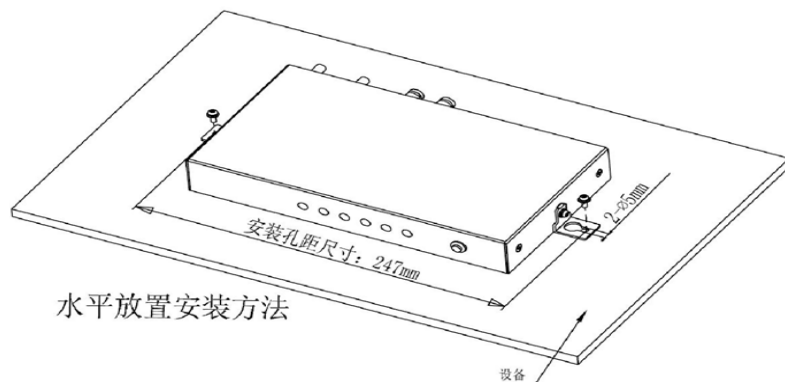

注：高清主机安装方式可作为参考；

安装方法之高清显示屏


1、使用螺丝刀，通过产品底部中间散热孔，将固定螺丝拧开，再将辅助挂板取下，见图一；

2、考虑到部分固定背板不能钻螺钉孔，所以提供两种安装方式：双面胶固定和螺钉固定。


方法一、通过双面胶及玻璃胶将辅助挂板固定于待安装背板上，见图二；

方法二、通过四个M4螺丝将辅助挂板固定在待安装背板上，见图三；


3、通过产品葫芦孔挂于辅助挂板的挂钉上；使用螺丝刀，从产品底部孔中将固定脱螺丝拧紧，见图四；

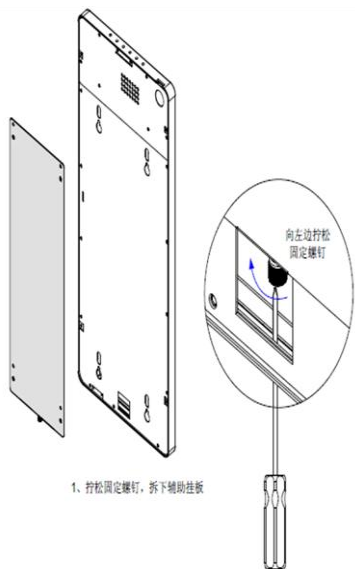


图一

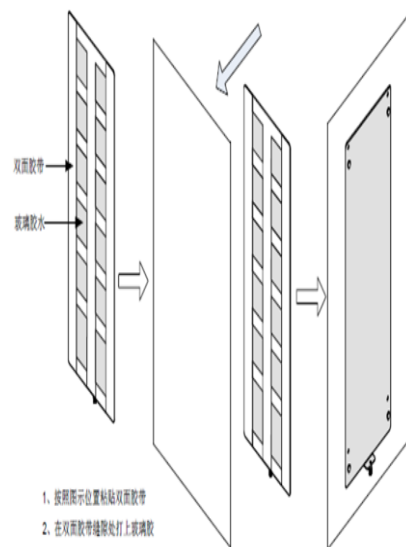

图二

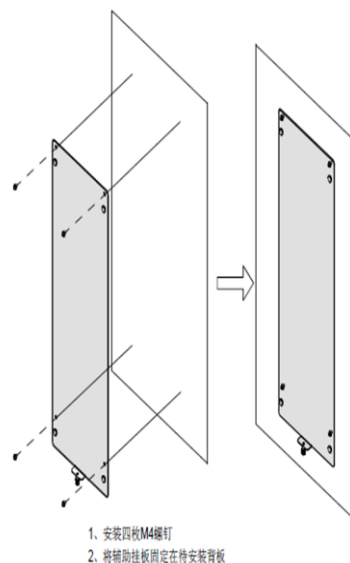


图三

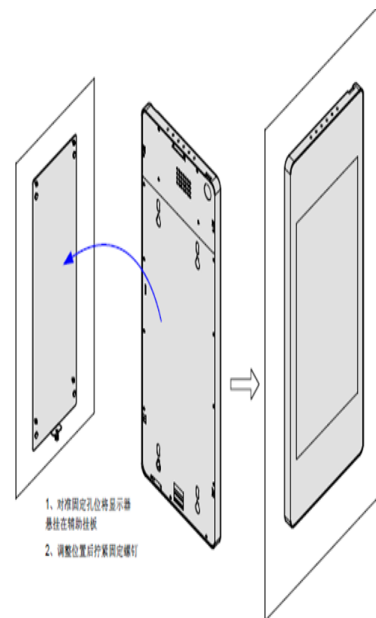


图四

安装方法之UPS电源

1、将安装支架固定在电源机箱上；

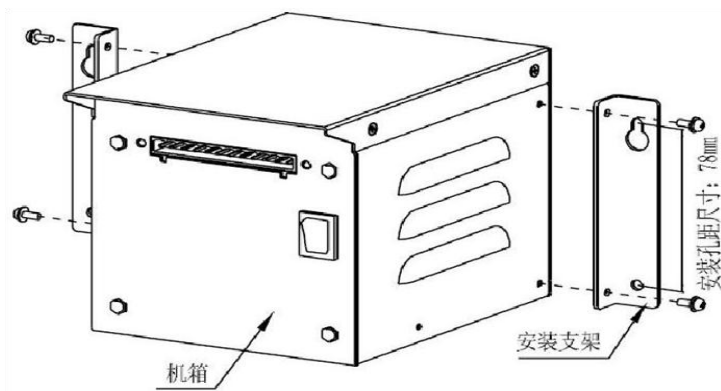

2、将电源机箱固定在平面上（为金属平面，在平面上开3.2mm的底孔，用M4x10mm螺丝固定；为混凝土墙面，在墙壁上开6mm的底孔，选用6x30mm的塑料胀栓塞入底孔，使用M4x20mm自攻丝固定）；

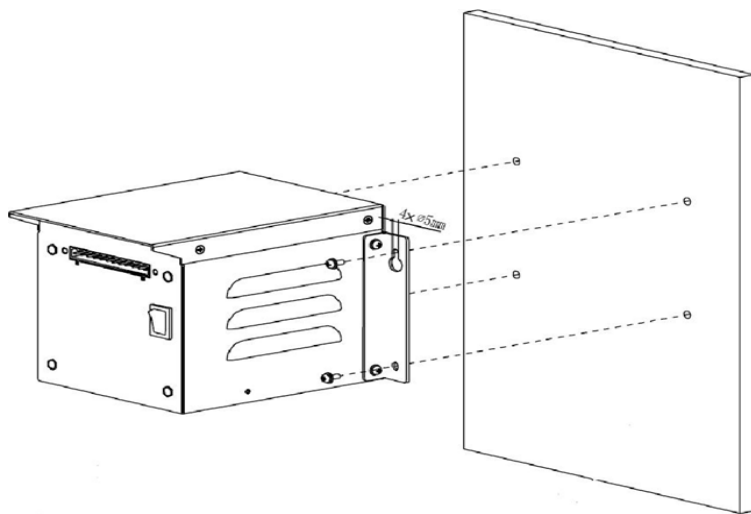


安装方法之WIFI定向天线

1. 电梯轿顶WIFI天线安装


1.1、将安装支架固定在WIFI模块上,见图一;

1.2、将WIFI天线组件固定在电梯轿顶护栏上（护栏安装底孔直径为3.2mm，用M4x10mm的自攻丝固定），见图二；


1.3、安装完成效果图，见图三；

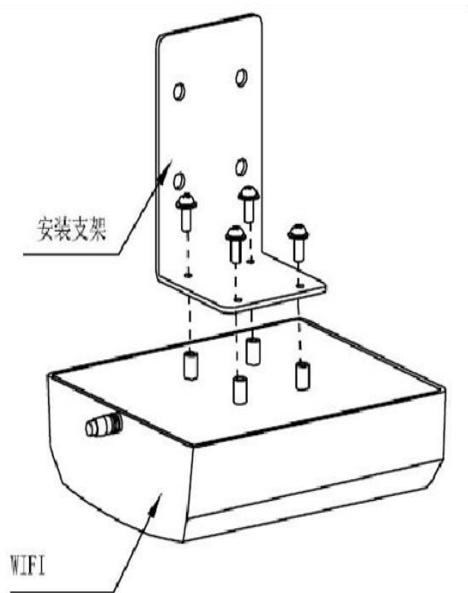

图一

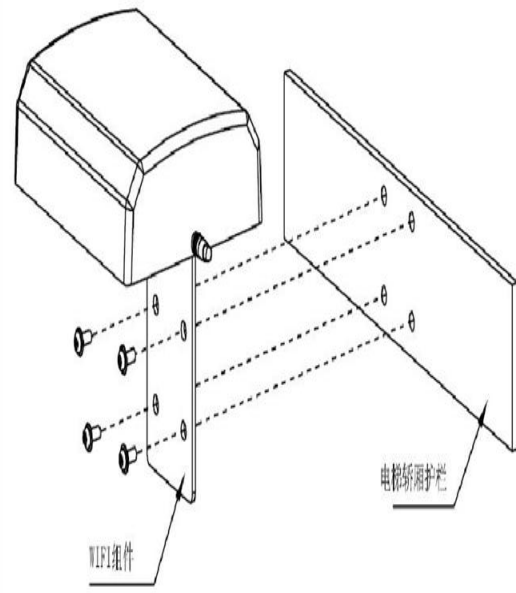

图二

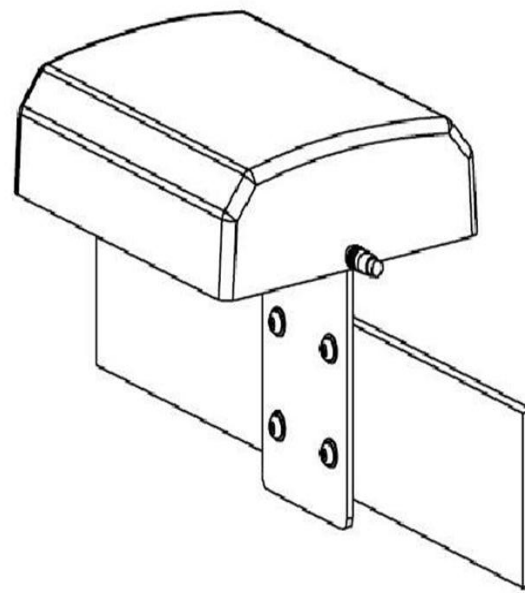

图三


安装方法之WIFI定向天线

2.电梯井道顶天花板WIFI天线安装


2.1、将安装支架固定在WIFI模块上,见图一;

2.2、将WIFI组件固定在电梯井道顶天花板（在天花板上开直径为6mm的安装底孔，选用M6x30mm的塑料胀栓塞入底孔，使用M4x20mm的自攻丝固定），见图二；


2.3、安装完成效果图，见图三；

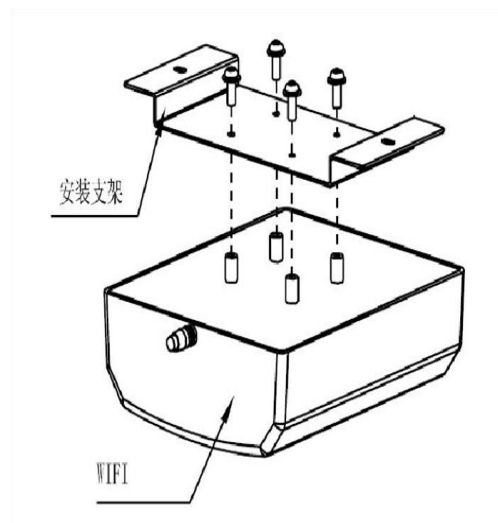

图一

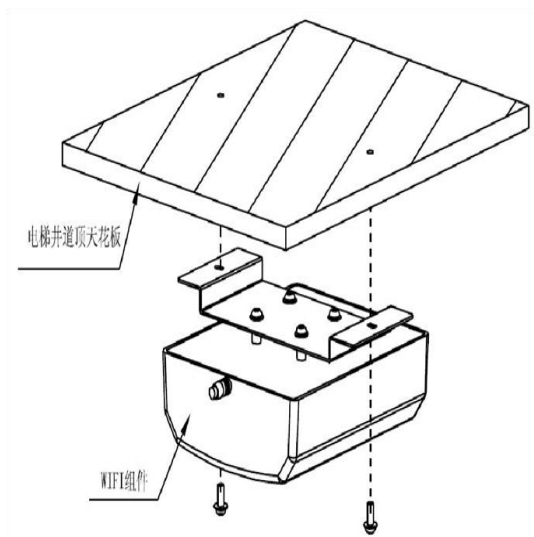

图二

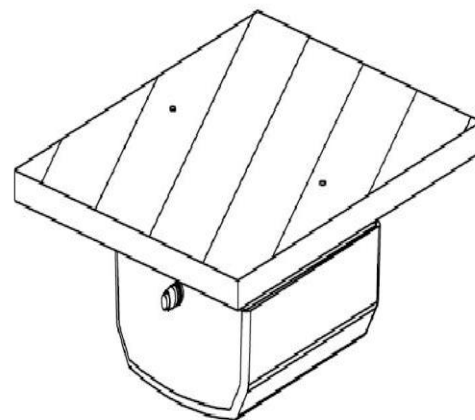

图三

订货信息

序号	型号	编码	备注
1	IOT-01S	01100009	包括：IOT-WL300DA-NN+IOT-WL120D+摄像头+WIFI定向天线
2	IOT-UPS12D	01027003	UPS电源
3	IOT-WD0185D-NN	01100004	南宁18.5寸显示屏，分辨率1366*768
4	IOT-WD0230D-NN	01100005	南宁23寸显示屏，分辨率1920*1080
5	NP/玻璃与金属密封胶	24050028	玻璃胶
6	DF20BR-双面胶带	19033062	双面胶
7	20180037支架	20180037	理线槽
8	塑料零件-尼龙扎线带	21020059	200×4.6mm
9	塑料零件-尼龙扎线带3	21020001	100×2.5mm

A faint, light blue world map is centered in the background of the slide. The map shows the outlines of continents and countries. At the bottom of the slide, there are two overlapping triangular shapes: a blue one on the left and a green one on the right, both pointing towards the center.

Never Stop Improving
进取·永不止步